

MOVE THE WORLD FORWARD  MITSUBISHI  
HEAVY  
INDUSTRIES  
GROUP

# HYDROLUTION




PARTNER OF



 **MITSUBISHI HEAVY INDUSTRIES  
AIR CONDITIONING EUROPE**



HEATING




HOT SANITARY



COOLING

# WHY A MHI HEAT PUMP?

Mitsubishi Heavy Industries air to water heat pump is a complete modern system for heating, cooling and producing hot sanitary water for houses. Offering effective energy saving and reducing carbon dioxide emission.

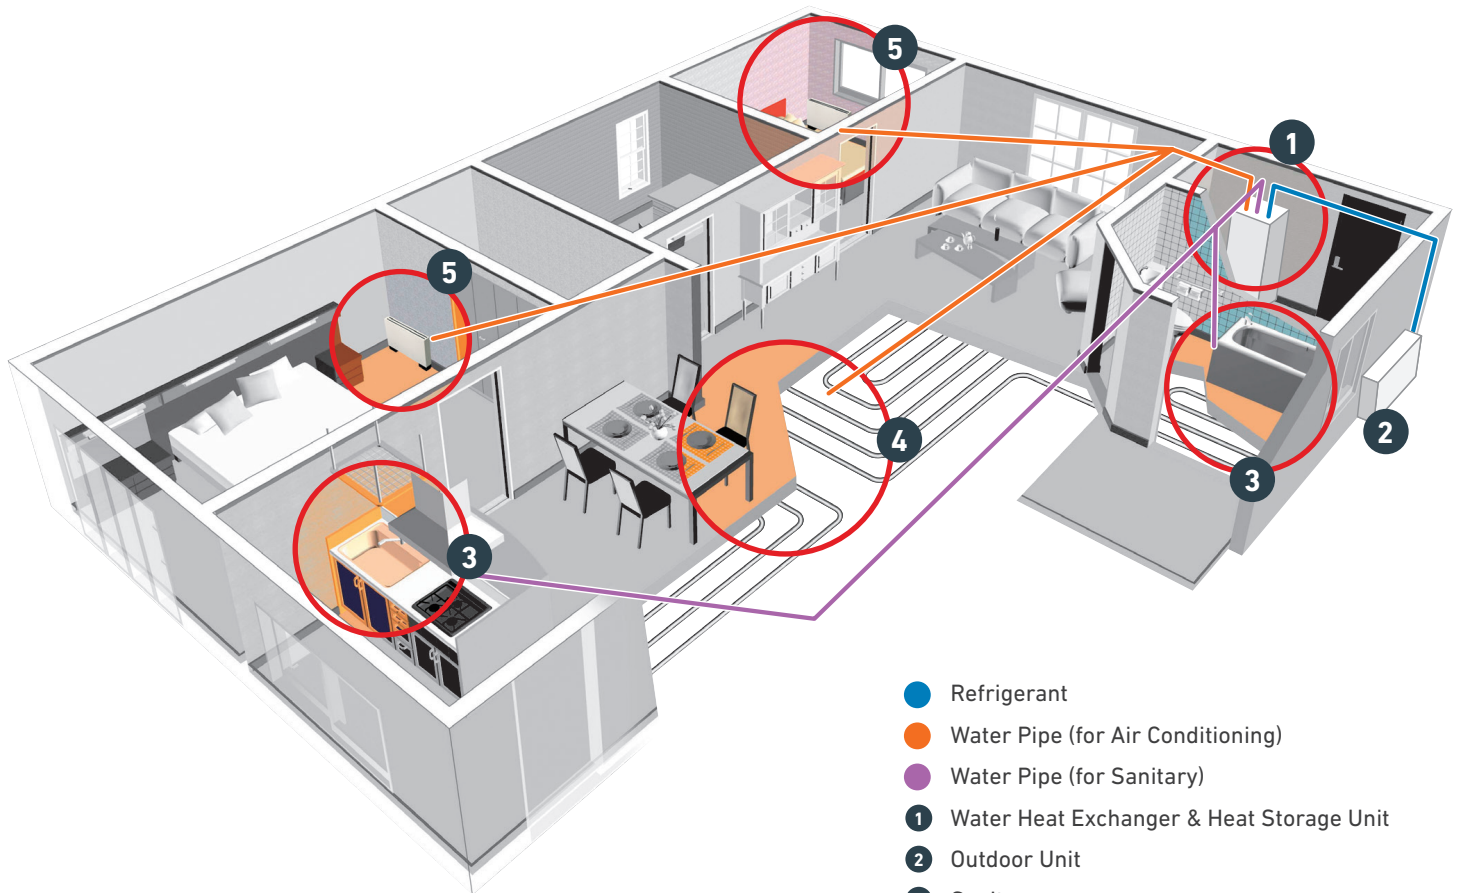

- Refrigerant
- Water Pipe (for Air Conditioning)
- Water Pipe (for Sanitary)
- 1** Water Heat Exchanger & Heat Storage Unit
- 2** Outdoor Unit
- 3** Sanitary
- 4** Floor Heating
- 5** Radiator or Fan Coil

## WHY A MHI HEAT PUMP?



**1 Our recognised contribution to global environment.**  
Our contributions to a low-carbon society encompass the entire product life cycle from efficient production, effective use of energy, effectual utilization of inexhaustible clean energy and recycling. This is a part of our accomplishments through unique technological features.

**2 Our assured integration of high technology is the mainstay of a low carbon society.**  
We have assured integration of high technology in a variety of areas including new clear power generation, transportation systems, desalination plants, and wind turbine generators. Our product portfolio covering entire social infrastructure is supported by our proven high technology. We integrate proprietary technologies which have already demonstrated their own significant capabilities in their fields to enhance the effect in our total solutions. Our air to water heat pump is an innovative system developed by using integration of high technology.

Mitsubishi Heavy Industries utilises its high technology in a variety of areas and provides comprehensive solutions for realization of a low-carbon society.

Air to Water heat pump is one of our products supported by our unrivalled technology to realise utmost energy savings, safety and assurance.

**3 Heat pump technology for a low-carbon society**  
Air to water heat pumps are a revolutionary energy recycling system which reduces environmental load by reusing heat energy produced in daily life. This first-rate energy saving system has been developed by our exceptional technology.

**4 Saving running costs with use of heat pump technology**  
Typically less than 1kW of output heat energy can be produced by conventional oil or gas boilers. Heat pump technology is capable of producing up to 5.32kW of heat energy from 1kW of energy input making the system 5.32 times more efficient than traditional means.



# BENEFITS OF HYDROLUTION

**Our heat pump is a complete modern system for heating and cooling room air and producing sanitary hot water.** It absorbs 'free' heat from outdoor air and amplifies it to generate ideal temperatures and hot water swiftly and efficiently.

## ENERGY SAVING

Optimum annual operation costs are achieved thanks to the inverter driven compressor. The speed of the compressor is controlled according to the demand resulting in the highest COP levels of 4.09~5.42\* in heating operation and is in accordance with Lot 1 energy class.

\*Condition 2 on page 9



## HIGH EFFICIENCY

The compressor is designed to be efficient even at low ambient temperatures (down to -20°C) in order to be able to withstand the toughest winter climates.



## INTEGRATED DESIGN

The compact size has been achieved by integrating the hot water tank for sanitary water use together with the water heat exchanger within the indoor units (HMA 60-S and HMA 100-S only). Electrical and piping work is simpler due to the integrated design.



## 65°C HOT WATER

Maximum flow line temperature is 65°C with the use of an auxiliary electric heater used for hot water back-up and to cope with irregular and excessive hot water demand. The heat pump can keep producing the temperature of 58°C hot water without an auxiliary electric heater and can still produce this even at ambient temperatures between -20-43°C.



## SILENT MODE

Silent mode function can reduce the sound level from the outdoor unit during heating mode by reducing the compressor and fan speed. The ON/OFF timer operation can be set with the remote controller.

Sound pressure level at 5m is 35 dB(A).



## INTERNET CONNECTION

Customers can get a brief overview and the status of the MHI heat pump and the heating system remotely. It allows customers to control heating and hot water production.



# NEXT GENERATION REFRIGERANT R32




## R32 REFRIGERANT



This next generation refrigerant boasts nearly 70% lower Global Warming Potential rate than R410A. Due to its superior qualities, R32 offers amazing energy efficiency benefits. It has a potential refrigerating effect that is 1.5 times that of R410A, meaning that it needs less energy to achieve the desired temperatures and requires less refrigerant volumes to operate.

## BENEFITS OF R32

- 1 Low Global Warming potential and Superior Energy Efficiency
- 2 Zero Ozone Depletion
- 3 Easy to recycle
- 4 It complies with F-Gas
- 5 Single component, easy to handle refrigerant
- 6 Already used in air conditioning systems and heat pumps worldwide
- 7 It requires up to 13% less charge compared to R410A

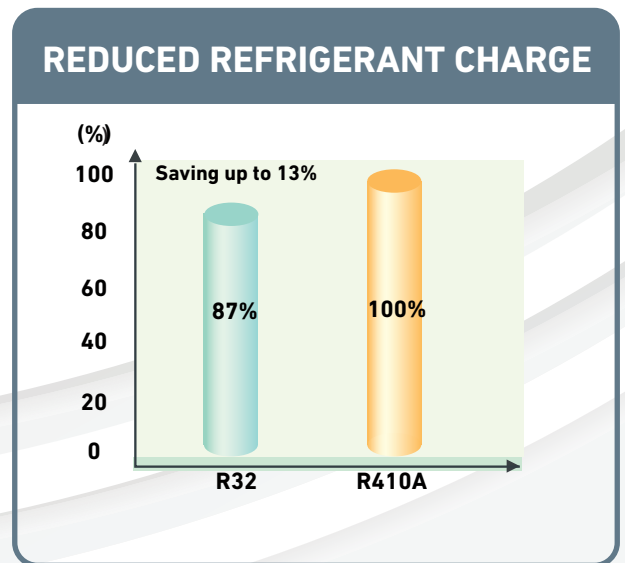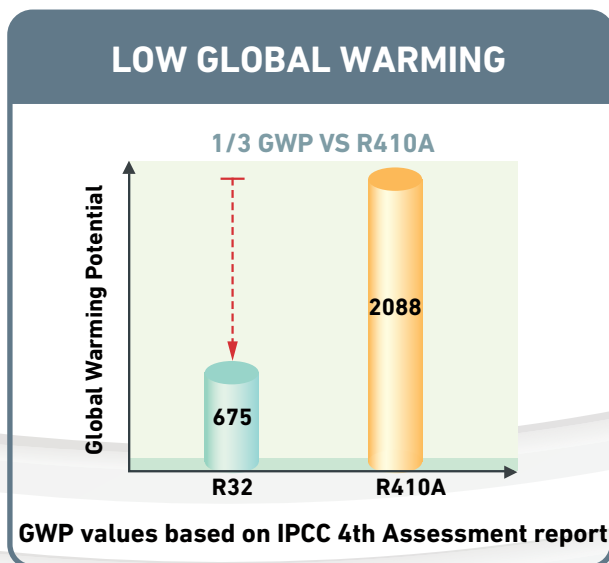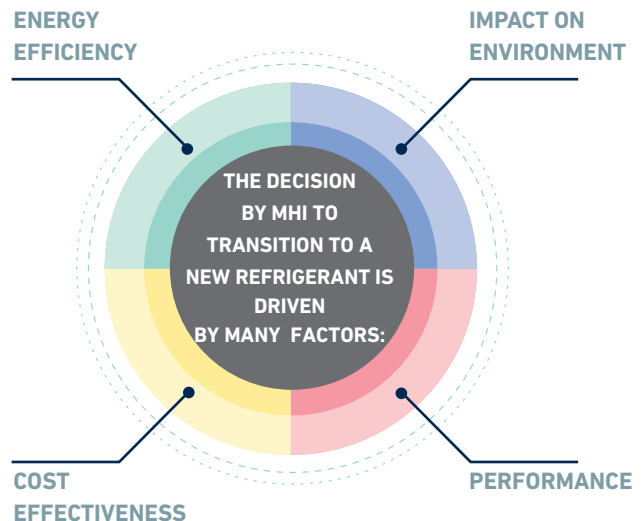

# SPECIFICATIONS

Mitsubishi Heavy Industries air to water heat pumps are a complete modern system for heating, cooling and producing hot sanitary water for living, offering effective energy saving.



## Indoor Unit (HMA)

- Flexible all in one indoor module for heating, cooling and hot water
- Upgrading existing heating systems or new builds with requirements for high hot water performance
- Equipped with a capacity of 180 litres of heated domestic water heater
- Integrated expansion vessel (10L)
- Has a built in condenser, as well two diverting valves (one of heating and cooling, the other for heating and hot water)
- Integrated electrical heater for backup
- Extra additional heat connection (eg: gas boiler, oil boiler).
- Integrated controller (advanced version)
- Available only in R410A version.



## Outdoor Unit

- FDCW60VNX-W **NEW**
- MHI high quality outdoor unit using low GWP refrigerant - R32
- Available only in 6kW version as a flexible combination (connectable to split box)
- Silent mode range expanded assuring sound pressure level of 35 db(A) at 5 meters
- Improved piping height from 7 to 20 meter
- Very energy efficient with a wide operation range
- Latest inverter & DC twin rotary compressor technology
- Compact design for easy installation
- Built in drain pan heater to improve defrost
- Blue coated fin for heat exchanger to prevent corrosion.



## Advanced Controllers

### RC-HY20-W, RC-HY40-W

Easy Operation: Advanced user friendly controller, which have large multicolor displays. It shows information about the status of the units.

RC-HY20-W: Base version without extension module.

RC-HY40-W: Advanced version with extension module. Room sensor and current sensor with cascade heat pump control function



Monitor and Control: The controller is compatible with myUpway, which is the internet function giving you a quick over view and presents the status of the installed units in order to monitor and manage the entire system. If an error occurs users will receive an email notification.



## Tank Unit

- Storage tank with coil designed to store hot sanitary water.
- Temperature indicator allows user to read and control water temperature in the tank
- Large heating surface of the coil provides high hot utility water efficiency
- Manages water pressure up to 10 bar



## Split Box

- Built in condenser
- Easy installation by use of wall bracket
- Good for flexible applications

**Our domestic air-to-water heat pump range offers a complete modern system for heating, cooling and producing hot sanitary water for houses.**

Thanks to the integration of a hot water heater, immersion heater, circulating pump and climate system within the indoor unit, the Hydrolution range is one of the safest, most economical and environmentally friendly options available today.



# SPECIFICATIONS

## All-in-one combination

Indoor Model			HMA 60-S <b>NEW</b>	HMA 100-S <b>NEW</b>	HMA 100-S <b>NEW</b>	
Outdoor Model			FDCW60VNX-A	FDCW71VNX-A	FDCW100VNX-A	
Power source			400V 3N AC (230V single-phase) 50Hz			
Heating Nominal capacity	condition 1	kW	2.28 (0.50 - 8.00)	8.0 (3.0 - 8.0)	9.0 (3.5 - 11.0)	
	condition 2	kW	2.67 (0.50 - 7.40)	8.3 (2.0 - 8.3)	9.2 (3.5 - 10.0)	
COP	condition 1		3.62	3.33	3.44	
	condition 2		5.32	4.09	4.28	
Cooling Nominal capacity	condition 1	kW	4.86 (0.80 - 6.00)	7.1 (2.0 - 7.1)	8.0 (3.0 - 9.0)	
	condition 2	kW	7.03 (1.20 - 7.80)	10.7 (2.7 - 10.7)	11.0 (3.3 - 12.0)	
EER	condition 1		2.64	2.68	2.81	
	condition 2		3.52	3.35	3.62	
Seasonal Space Heating *1 Energy Efficiency Class (W55/W35)			A++/A++	A+/A+	A++/A++	
Water Heating Energy Efficiency Class *1			A	A	A	
Seasonal Space Heating Energy Efficiency (W55/W35) *1			% 188/138	% 149/119	% 165/126	
Water Heating Energy Efficiency *1			% 89	% 99	% 98	
Seasonal Space Heating Energy *1 *2 Efficiency Class of package (W55/W35)			A++/A+++	A+/A++	A++/A++	
Seasonal Space Heating Energy *1 *2 Efficiency of package (W55/W35)			192/142	153/123	169/130	
Operation range (Ambient temperature)		heating	-20° - 43°C			
		cooling	15° - 43°C			
Operation range (Water temperature)		heating	25- 58°C (65°C, with immersion heater)			
		cooling	7-25°C			
Max refrigerant pipe length		m	30			
Max height difference between IU and OU		m	7			
Indoor unit	Height x Width x Depth		mm	1600(+ 40 max) x 600 x 610	1600(+ 40 max) x 600 x 610	1600(+ 40 max) x 600 x 610
	Weight (without water in the system)		kg	160	164	164
	Tank Surface			Enamel Coated		
	Tank Volume total		liter	180	180	180
	Volume of coil		liter	4.8	4.8	4.8
	Volume expansion vessel		liter	10	10	10
	Dimensions, climate system pipe		mm	22	22	22
	Dimensions, hot water pipe		mm	22	22	22
	Water pipe connections			Compression fittings		
	Immersion Heater		KW	9 (4.5 for single-phase) (3 Step)		
Max current		A	20 (45 for 230V Single-phase)	20 (45 for 230V Single-phase)	23 (45 for 230V Single-phase)	

\*1 European Average climate conditions

\*2 In case of a room temperature sensor connected

\*3 Sound pressure level is 1m away in front of outdoor unit at the height of 1m

## Outdoor unit

Model		FDCW60VNX-W <b>NEW</b>	FDCW60VNX-A	FDCW71VNX-A	FDCW100VNX-A	FDCW140VNX-A
Power source		1 phase 230V 50Hz				
Height x Width x Depth	mm	640 x 800 x 290		750 x 880 x 340	845 x 970 x 370	1300 x 970 x 370
Weight	kg	46		60	81	105
Sound Power level (A7/W35)	dB(A)	52	53	64	64.5	71
Sound Pressure level*3 (A7/W35)	dB(A)	44	45	48	50	54
Airflow	m3/min	41.5		50	73	100
Refrigerant type		R32		R410A		
Refrigerant volume (pipe length without additional charge)	kg (m)	1.3 (15)	1.5 (15)	2.55 (15)	2.9 (15)	4.0 (15)
Dimensions, refrigerant pipe		Gas pipe: OD 12.7(1/2"), Liquid pipe: OD 6.35(1/4")		Gas pipe: OD 15.88 (5/8"), Liquid pipe: OD 9.52 (3/8")		
Ref pipe connections		Flare Connection				
Max current		15		16	23	25



## Flexible combination

Split box				HSB60-W <b>NEW</b>	HSB60-W	HSB100	HSB100	HSB140
Outdoor Model				FDCW60VNX-W	FDCW60VNX-A	FDCW71VNX-A	FDCW100VNX-A	FDCW140VNX-A
Power source				1 phase 230V 50Hz	1 phase 230V 50Hz	1 phase 230V 50Hz	1 phase 230V 50Hz	1 phase 230V 50Hz
Heating Nominal capacity	condition 1		kW	2.7 (2.70 - 8.00)	2.28 (0.50 - 8.00)	8.0 (3.0 - 8.0)	9.0 (3.5 - 11.0)	16.5 (5.8-16.5)
	condition 2	High capacity	kW	5.08 (0.90 - 7.60)	-	8.3 (2.0 - 8.3)	9.2 (3.5 - 10.0)	16.5 (4.2-17.2)
		Low capacity	kW	2.64	2.67 (0.50 -7.40)	-	-	-
COP	condition 1			3.06	3.62	3.33	3.44	3.31
	condition 2	High capacity		5.16	5.32	4.09	4.28	4.2
		Low capacity			5.42	-	-	-
Cooling Nominal capacity	condition 1		kW	5.31(0.60 - 6.30)	4.86 (0.80 -6.00)	7.1 (2.0 - 7.1)	8.0 (3.0 - 9.0)	11.8 (3.1-11.8)
	condition 2		kW	7.54 (1.20 - 7.80)	7.03 (1.20 -7.80)	10.7 (2.7 - 10.7)	11.0 (3.3 - 12.0)	16.5 (5.2-16.5)
EER	condition 1			2.73	2.64	2.68	2.81	2.65
	condition 2			3.57	3.52	3.35	3.62	3.78
Seasonal Space Heating Energy Efficiency Class (W55/W35)				A++/A+++	A++/A++	A+/A+	A++/A++	A++/A++
Seasonal Space Heating Energy Efficiency (W55/W35)			%	137/190	138/188	119/149	126/165	133/166
Seasonal Space Heating Energy *2 Efficiency Class of package (W55/W35)				A++/A+++	A++/A+++	A+/A++	A++/A++	A++/A++
Seasonal Space Heating Energy *2 Efficiency of package (W55/W35)			%	141/194	142/192	123/153	130/169	137/170
Operation range (Ambient temperature)			heating	-20°C -43°C				
			cooling	15°C - 43°C				
Operation range (Water temperature)			heating	25°C- 58°C (65°C, with immersion heater)				
			cooling	7-25°C				
Refrigerant type				R32	R410A			
Max refrigerant pipe length			m	30	30			
Max height difference between IU and OU			m	20	7			

## Tank unit

Model		PT300	PT500
Power source		-	-
Volume	liter	279	476
Volume of coil	liter	9.4	13
Immersion heater	kW	Not included	Not included
Height x Width x Depth	mm	1634 x 673 x 734	1835 x 832 x 897
Weight	kg	115	156
Dimensions, climate system pipe	inch	1" Male	1" Male
Dimensions, hot water pipe	inch	1" Male	1" Male
Inner Surface		Enamel	
Design Pressure Tank	Bar	10	
Design Pressure Coil	Bar	16	
Energy Class		C	C

## Split box

Model		HSB60-W <b>NEW</b>	HSB100	HSB140
Power source		1 phase 230V 50Hz	1 phase 230V 50Hz	1 phase 230V 50Hz
Operation range (Water temperature)	heating	25-58°C (65°C, with immersion heater)		
	cooling	7-25°C		
Max pressure, climate system	bar	10		
Connection Water System	mm	22	28	28
Ambient temperature	°C	5 - 35		
Height x Width x Depth	mm	400 x 460 x 250		
Weight	kg	16	18	23
Recommended fuse rating	A	6	6	6
Refrigerant type		R32 or R410A	R410A	R410A

## Test conditions

		Water Temperature	Ambient Temperature
Heating	condition 1	45°C out / 40°C in	7°C DB / 6°C WB
	condition 2	35°C out / 30°C in	
Cooling	condition 1	7°C out / 12°C in	35°C DB
	condition 2	18°C out / 23°C in	



# SYSTEM COMBINATIONS

Mitsubishi Heavy Industries extensive product range offers the right heat pump to suit every demand. Our product is a suitable comprehensive solution for existing buildings and houses as well as new builds.

## ALL-IN-ONE COMBINATION

### (Outdoor Unit + HMA system)

ALL-IN-ONE COMBINATION provides the comprehensive solution for all your heating, cooling and domestic hot water needs.

Each ALL-IN-ONE COMBINATION includes the set of an outdoor unit and HMA system, providing an all-inclusive indoor unit integrating hot water heater, immersion heater, circulating pump and climate system within one unit.

- **Heating, Cooling and Hot water**
- **Easy installation and operation**  
A single neatly packaged all-in-one indoor unit and a well designed outdoor make the installation as smooth and straight forward as possible.
- Ideal for residential use from apartments to small houses
- **Available in R410A only**



---

## SYSTEM COMBINATIONS

---

### FLEXIBLE COMBINATION

#### (HSB system)

FLEXIBLE COMBINATION offers space heating and cooling with the option to add sanitary hot water to the system.

FLEXIBLE COMBINATION consists of an outdoor unit and HSB system (Split box) and by combining the separate accessories, FLEXIBLE COMBINATION makes installation even more complete for your climate needs.

- **Heating and cooling only option**  
Mitsubishi Heavy industries air to water heat pumps captures fresh air to heat or cool the property and ensure maximum comfort throughout the year. Heating and cooling only option is available by additionally connecting any FLEXIBLE COMBINATION with a charging pump and an immersion heater.
- **Hot water option**  
Hot water system option can be available by additionally connecting any FLEXIBLE COMBINATION with a charging pump, an immersion heater, a tank and shuttle valve.
- **Flexible installation of units**  
You can combine the variety of accessories to suit your demand.
- **Available from 6kW (R32/R410A) to 14kW (R410A)**



# SYSTEM COMBINATIONS



		Controller	Outdoor	All-in-one	Split box	Tank	Immersion heater (tank)	Immersion Heater	Charging Pump	Shuttle Valve
All-in-one	Combination 1		FDCW60VNX-A	HMA 60-S						
	Combination 2		FDCW71VNX-A	HMA 100-S	-	-	-	-	-	-
	Combination 3		FDCW100VNX-A							
Flexible	Combination 4	RC-HY20-W RC-HY40-W	FDCW60VNX-A/W	-	HSB60-W	PT300 PT500	ME1030M + HR10M (Optional)	ELK9M (Optional)	CPD11-25M/65 CPD11-25M/75	VST05M VST11M VST20M
	Combination 5		FDCW71VNX-A		HSB100					
	Combination 6		FDCW100VNX-A		HSB140	PT500				
	Combination 7		FDCW140VNX-A							
Heating and Cooling Only	Combination 8		FDCW60VNX-A/W	-	HSB60-W	-	-			
	Combination 9		FDCW71VNX-A		HSB100					
	Combination 10		FDCW100VNX-A							
	Combination 11		FDCW140VNX-A		HSB140					



58°C at -20°C



Heating



Cooling



Domestic hot water



35 dB(A)\*



myUpway™



Improved energy efficiency



Energy saving



\*FDCW60VNX-W

# SYSTEM COMBINATIONS

The following combination of the products is recommended.



## All-in-one 6

- Building heating load up to 8 kW
- Heating, hot water, cooling
- Cooling down to 7 °C



## All-In-One 8

- Building heating load up to 8 kW
- Heating, hot water, cooling
- Cooling down to 7 °C



## All-In-One 12

- Building heating load up to 11 kW
- Heating, hot water, cooling
- Cooling down to 7 °C



## Flexible 6

- Split-box system for heating, hot water as required & cooling
- Building heating load up to 8 kW
- Cooling down to 7 °C



## Flexible 8

- Split-box system for heating, hot water as required & cooling
- Building heating load up to 8 kW
- Cooling down to 7 °C



## Flexible 12

- Split-box system for heating, hot water as required & cooling
- Building heating load up to 11 kW
- Cooling down to 7 °C



## Flexible 16

- Split-box system for heating, hot water as required & cooling
- Building heating load up to 16.5 kW
- Cooling down to 7 °C



## Heating & Cooling 6

- Split-box system for heating & cooling
- Building heating load up to 8 kW
- Cooling down to 7 °C




## Heating & Cooling 8

- Split-box system for heating & cooling
- Building heating load up to 8 kW
- Cooling down to 7 °C



## Heating & Cooling 12

- Split-box system for heating & cooling
- Building heating load up to 11 kW
- Cooling down to 7 °C



## Heating & Cooling 16

- Split-box system for heating & cooling
- Building heating load up to 16.5 kW
- Cooling down to 7 °C

# ACCESSORIES



## ECS40M/ECS41M

Extra mixing valve set, including a room sensor, for adjusting temperature in several climate systems. (e.g. A radiator system and an underfloor heating)

### Contents

- |                            |                        |
|----------------------------|------------------------|
| 4 x Cable ties             | 2 x Aluminium tape     |
| 1 x Circulation pump       | 1 x Insulation tape    |
| 1 x Shunt motor            | 2 x Replacement gasket |
| 1 x 3-way valve            | 2 x Temperature sensor |
| 1 x Kit for accessory card | 1 x Room sensor        |
| 2 x Heating pipe paste     |                        |

ECS40M for maximum 80m<sup>2</sup> floor heating

ECS41M for 80-250 m<sup>2</sup> floor heating

RC-HY40-W

HMA



## RTS40M

Room sensor

RC-HY40 and HMA include one sensor

RC-HY20-W

RC-HY40-W

HMA



## AXC30M

Accessory card

RC-HY40-W

HMA



## RMU40M

Room sensor/controller with multicolour display

HMA

RC-HY40-W



## VST05M / VST11M / VST20M

Reversing valve for using hot water accessories and prioritising hot water demand.

VST05M (Ø 22mm, Max.electric charge output: 11kW)

VST11M (Ø 28mm, Max.electric charge output: 17kW)

VST20M (DN32, (1¼"), Max.electric charge output: 40kW)

RC-HY20-W

RC-HY40-W

## ACCESSORIES



### VCC05M / VCC11M

Reversing valve for changing operation of cooling and heating.

VCC05M (Ø 22mm)

VCC11M (Ø 28mm)

**RC-HY20-W** **RC-HY40-W**



### EMK300M / EMK500M

Energy measurement kit for measuring the flow and temperature differences in the charge circuit. Information can be shown on RC-HY40's display.

EMK300M (Measurement range 5.0-85 l/min)

EMK500M (Measurement range 9.0-150 l/min)

**RC-HY40-W** **HMA**



### Anode M300 / Anode M500

Magnesium anode chain

Anode M300 for PT300 (Ø26 x 8 pieces (G1"))

Anode M500 for PT500 (Ø33 x 5 pieces (G1¼"))

**PT300** **PT500**



### Anode T300 / Anode T500

Anode titanium complete

Anode T300 for PT300

(Length: 200mm, G¾", 230V)

Anode T500 for PT500

(Length: 400mm, G¾"230V)

**PT300** **PT500**




### HR10M

Relay for ME1030M

Used to control external 1 to 3 phase loads such as oil burners, immersion heaters and pumps.

**PT300** **PT500**



### ME1030M

Immersion heater designed to heat up domestic hot water installations. (3kW, G1½", 230V)

**PT300** **PT500**




### CPD11-25M/65 / CPD11-25M/75

DC Motor controlled water pump.

HSB60-W/100 --> CPD11-25M/65

HSB140 --> CPD11-25M/75



### ELK9M

Immersion heater that can be used to supplement the heating capacity of heat pumps.

Power source: 3~400V50Hz

Output: 9kw

Fuse 13A



**STULZ GROEP B.V.**  
 Weverij 7-9  
 1185ZE Amstelveen  
 Tel: 020 - 545 11 11  
 www.stulz-benelux.com  
 info@stulz.nl

**Before use**

In order to get the greatest benefit from our Air to Water Heat Pump, read thoroughly the User's Manual .

**Places**

Do not install in places where combustible gas could leak or where there are sparks. Keep away from places where combustible gas could be generated, flow or accumulate, or locations containing carbon fibres, otherwise there is a danger of fire.

**Installation**

Installation must be carried out in accordance with current norms and directives.

Current regulations require the inspection of installation before commissioning and the inspection must be carried out by a suitable qualified personnel and should be documented. Improper installation will lead to water leakage, electric shocks, fires and other serious problems.

Make sure that the indoor unit and the outdoor unit are stable in installation and fixed on stable base.



**ISO9001**

Our Air-Conditioning & Refrigeration Division is an ISO9001 approved factory for residential air conditioners and commercial-use air conditioners (including heat pumps).



BIWAJIMA PLANT  
 Mitsubishi Heavy Industries, Ltd.  
 Air-Conditioning & Refrigeration Division  
 Certified ISO 9001  
 Certificate number : JQA-0709



MITSUBISHI HEAVY INDUSTRIES-  
 MAHAJAK AIR CONDITIONERS CO., LTD.  
 Certified ISO 9001  
 Certificate Number : 44 100 980813

**ISO14001**

Our Air-Conditioning & Refrigeration Division has been assessed and found to comply with the requirements of ISO14001.



ISO 14001  
 Certificate Number: YKA4005636



MITSUBISHI HEAVY INDUSTRIES-  
 MAHAJAK AIR CONDITIONERS CO.,LTD.  
 Certificate Number : 04 104 980813

